


ride comfort

Bead wire ensures the

assembly safety of tire and rim



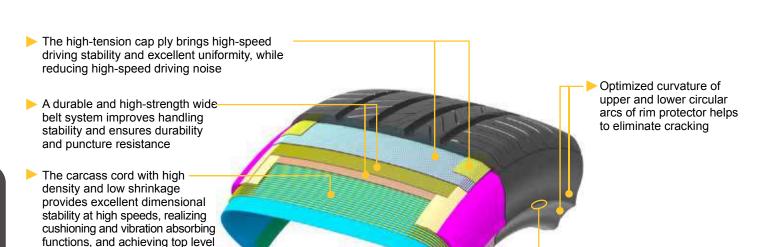

noise.

 Large rim protector tape effectiveely protects the rim from scratches and

damage



## **FEATURES & BENEFITS**

## **COMFORTABLE AND QUIET**







### **SOUND-MUTING WATER WAVE PATTERN**

Based on the soft bionic structure design of water flow, the flowing lines can break the air flow in the main groove and optimize the tire noise


#### **OPTIMAL DESIGN OF VARIABLE PITCH AND DISLOCATION**

The design of three-band variable pitch and dislocation effectively optimizes the inside noise of a driving car, also improving driving comfort

## PIPE NOISE OPTIMIZATION TECHNOLOGY

The optimized transverse grooves of the crown lead to the longitudinal grooves, effectively reducing the pipe resonance and unwanted sound

## PRECISE CONTROL AND BRAKING SAFETY



## 3D DESIGN OF OUTER PERIMETER GROOVE

The outer main groove adopts 3D design, which accurately optimizes the stiffness of blocks and improves the control response for turning

#### OPTIMIZED DESIGN OF TRANSVERSE GROOVE'S CUTTING ANGLE

Achieves effective boundary curling inhibition effect, making the tire contact more uniform, while decreasing braking distance and to improving driving safety

#### **GROOVE PRE-DEFORMATION TECHNOLOGY**

A new groove pre-deformation design facilitates drainage and reduces the tread creep deformation to achieve precise control

The water film is 'sucked' into the transverse groove and then quickly discharged into the main groove. This process accelerates drainage, while ensuring wet grip performance and abrasion throughout the life cycle

#### WIDENED & OPTIMIZED POSITIONING OF LONGITUDINAL GROOVE

The optimized longitudinal groove ratio combines a widened groove in the middle, to obtain excellent drainage performance on wet roads

## Control P10

P10	Size	Speed Rating	Load Index
17	225/50R17	W	94
	225/55R17	W	97
18	245/45R18	W	100
	235/40R18	W	95
	225/50R18	V	99
	245/40R18	Υ	93
	245/60R18	V	105
	235/45R18	Υ	98
	235/50R18	V	101
19	245/55R19	Н	103
	245/45R19	V	98
	225/45R19	W	92
	245/35R19	Υ	93

#### Load **Speed** P10 Size Rating Index 255/40R19 19 Υ 100 245/45R19 W 102 20 235/55R20 W 102 255/40R20 101 Υ 245/50R20 V 102 235/50R20 W 104 275/50R20 W 109 255/45R20 W 101 235/45R20 ٧ 100 245/45R20 103 ۱۸/ 21 265/45R21 ٧ 108 22 275/40R22 W 107

# Control P10 Milie

P10 RUNFLAT	Size	Speed	Load
HOTH LAI		Rating	Index
18	245/45R18	W	100
	245/50R18	W	100
	225/45R18	Υ	95
	225/50R18	W	95
	245/40R18	Υ	97
19	245/45R19	Υ	98
	245/40R19	Υ	98
	275/40R19	Υ	101
	275/35R19	Υ	96